



V-Series Freezers

VF MODELS –

Stainless steel front.
Aluminum sides and
interior.

VF-1
VF-2
VF-3



Standard Features:

- Stainless Steel Fronts for Durability
- Polished Aluminum Sides
- Energy Efficient ABS Thermal Breakers Around Door Jamb
- Adjustable 6" Legs
- Recessed Interior Lighting
- Exterior Dial Thermometer
- Lifetime Self-Closing Camlift Hinges with 120° Stay-Open Feature
- Self-Adjusting Magnetic Door Gaskets
- Heavy Duty Cylinder Locks
- Durable and Energy Efficient ABS Interior Door Liners
- Field Reversible Door Swing
- Door Opening Accepts 20" Wide Pan(s)
- Epoxy Coated Shelves Adjustable on 1" Centers
- Automatic Non-Electric Condensate Disposal System
- Environmentally Friendly CFC & HCFC Free Refrigerants
- Anti-Corrosion Coated Evaporator Coil
- Cord Connected
- Automatic Defrost

Optional Features:

- Rod Type Pan Slides
- Stainless Steel Angle Type Pan Slides
- Heavy Duty Swivel Casters with Brakes
- Two Half Doors in Place of One Full Length Door
- Change Door Swing
- Solar Digital Thermometer

Cabinet:

Victory's Value Packed V-Series Freezers are constructed of heavy gauge, polished stainless steel and aluminum to maintain an attractive appearance and maximum durability for years to come.

Interiors feature coved corners that are easy to clean and maintain. An average of over 2-1/2 inches of foamed-in-place polyurethane insulation throughout the cabinet assures the food storage compartment remains well insulated promoting energy efficiency. The bottom of the storage compartment is made of heavy gauge metal with 3-1/2 inches of polyurethane insulation for exceptional strength. Interior lighting is recessed.

Doors:

The self-closing doors stay open at 120° facilitating loading. Each door has a cylinder lock.

Shelving:

Heavy duty, epoxy coated steel shelves are mounted on pilaster strips and are adjustable on 1" increments. Wide door openings accommodate two 12" x 20", or one 18" x 26", or one 14" x 18" pans/trays per level.

Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection cooling coil are contained in an insulated housing separate from the product zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

The R404A refrigerant used is environmentally friendly.



Victory Refrigeration
110 Woodcrest Road
Cherry Hill, NJ 08003-3648 U.S.A.
PH: (856) 428-4200 FAX: (856) 428-7299
Website: www.victory-refrig.com
E-Mail: sales@victory-refrig.com

DIMENSIONS	One Section	Two Section	Three Section
	Reach-In	Reach-In	Reach-In
Width, Overall	26-1/2"	52-1/8"	77-3/4"
Depth, Overall (incl. handles)	33-1/4"	33-1/4"	33-1/4"
Height, Overall (incl. adj. legs)	83-5/8"	83-5/8"	83-5/8"
Depth, Open Door 90°	56-1/2"	56-1/2"	56-1/2"
Clear Door Opening Width	21-1/4"	21-1/4"	21-1/4"
Clear Full Door Opening Height	54"	54"	54"
Clear Half Door Opening Height	25-1/4"	25-1/4"	25-1/4"

CAPACITY

Rated Capacity (cubic feet)	21.0	45.4	69.0
Number of Full Door(s)	1	2	3
Number of Half Doors	2	4	6
Number of Shelves	3	6	9
Shelf Area (square feet)	17.1	36.0	54.2


ELECTRICAL/REFRIGERATION

Cabinet Voltage	115/60/1	115/60/1	115/60/1
Feed Wires	2	2	3
Condensing Unit Voltage	115/60/1	115/60/1	208-230/ 60/1
Condensing Unit Size (HP)	1/3	1/2	3/4
Total Amperes	8.5	12.0	12.9
Plug, NEMA	5-15P	5-15P	Hardwire


CRATED SHIPPING DATA

Height	87"	87"	87"
Width	36-1/2"	63-5/8"	90-3/4"
Depth	44-3/4"	44-3/4"	44-3/4"
Cubic Feet	82.2	143.3	204.4
Weight (lbs.)	315	465	620


NOTE: We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

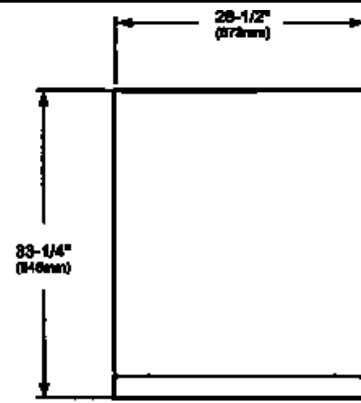


ONE SECTION PLAN VIEW

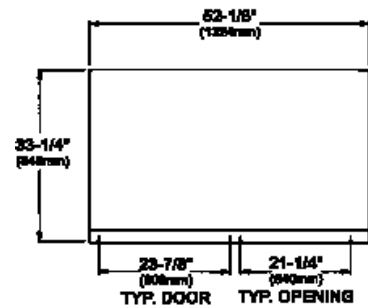

TWO SECTION PLAN VIEW

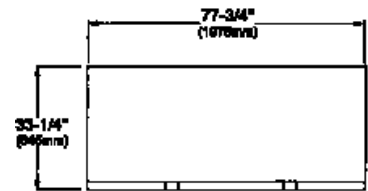

THREE SECTION PLAN VIEW

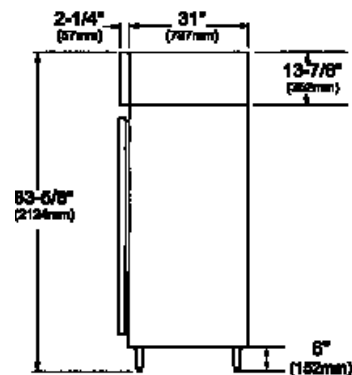

SIDE ELEVATION

Dimensional tolerance $\pm 1/4$ " Metric Dimensions (mm)