





# 3600PF Manual **Frozen Meat** Slicer

## Model

□ 3600PF - Manual Frozen Meat Slicer

Features a 13" serrated knife and a high-performance gear drive system specifically designed for this tough application.

### **Standard Features**

- 13" hardened steel alloy serrated knife
- High-performance gear drive system
- Powerful 1/2 HP, 7 amp motor
- Exclusive stainless steel construction
- Built in antimicrobial protection
- Precision gear slice thickness adjustment
- *EZ-Glide*<sup>™</sup> adjustable slicing table
- · Open space base design
- · Knife cover interlock
- · Permanently attached knife ring guard
- Full gravity feed, 45° angle
- 3 lb. stainless steel end weight
- Cleaning brace
- Power indicator light
- No voltage release

2 years parts and 1 year labor plus

	~	•.	_	-	0		~	. ,	$\sim$	_	~	-	_	10 1	es
	ı b				•	_			A ( :		_	~			_
$\smile$	~	•	$\mathbf{}$		•	м			$\mathbf{v}$	v	$\sim$	,.	v		-
_	-														

- ☐ Front mounted end weight assembly
- Unique dual wheel lift lever
- □ Low food fence (12"L x 1 %"H)
- ☐ High food fence (12"L x 3"H)
- □ 3" extension legs
- □ 10 lb. attachable portion control scale
- Clear plastic slicer cover

Star	1 <b>a</b>	ar	a	V١	va	rr	ar	11	y
	_								

15 years on the knife drive gears

Approved By:\_\_\_

Made in the U.S.A.



Date:



# **GLOBE FOOD EQUIPMENT COMPANY**

2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423 Fax: 937-299-4147



# **Manual Frozen Meat Slicer**

3600PF

Finish: Exclusive all stainless steel base with radiused corners improves sanitation and durability. Other stainless steel parts include the food chute, slicing table, end weight, and knife cover.

Knife Motor: Powerful 1/2 HP, 7 amp, 115/60/1, air cooled, permanently lubricated sealed ball bearings. Solid state start relay.

Knife Drive: Cross axis helical gear drive design, which is continuously lubricated in an oil bath, ensures guiet operation and superior cutting performance when slicing frozen meat.

Slice Thickness: Precision dual gear design eliminates table movement during slicing. Consistently produces tissue thin slices with a maximum slice thickness of 1 1/4" thick.

Antimicrobial Protection: Knobs and handles have antimicrobial protection built in, which inhibits the growth of bacteria and provides superior sanitation.

Full Gravity Feed: Full 45° angle feed requires less mechanical pressure. Equipped with a 3 lb. stainless steel end weight to minimize waste and hold product. Food chute handle is ergonomically designed and the end weight swings away for storage behind the chute.

**Table**: *EZ-Glide*<sup>™</sup> adjustable slicing table is designed to reduce surface friction, facilitating a smooth and easy slicing stroke.

Cleaning Brace: A metal brace under the slicer drops into position, tilting the slicer to facilitate safe and easy cleaning underneath the slicer.

# **Specifications**

Knife Cover Interlock: Slicer will not operate with knife cover removed.

Knife Ring Guard: Permanently mounted knife ring guard covers the non-slicing portion of the knife protecting the operator from the knife's edge.

Serrated Knife: 13" diameter special hardened steel alloy serrated knife with stain resistant finish and sanitary hub easily slices through frozen meat. Knife's edge has a Rockwell hardness of 60-62.

No Voltage Release: Prevents inadvertent reactivation of slicer in the event of power or interlock interruption.

Cutting Capacity: Width 11.6" (29.5cm), Height 9" (22.9cm), Diameter 7.5" (19cm)

On/Off Tab: Moisture protected toggle type, operated by a push-pull rod.

Power Indicator Light: A readily visible white light illuminates when the knife is rotating.

Cord & Plug: Attached 7 foot flexible 3 wire cord with molded plug fits a grounded receptacle.

#### Dimensions:

Foot Print = 14" x 21.6"

(35.6 cm x 54.9 cm)

Overall Length = 26.2" (66.5 cm) Overall Width = 22" (55.9 cm) Overall Height = 21.1" (53.6 cm)

Freight Class: 77.5

Net Weight: 112 lbs. (50.8 kgs.) Shipping Weight: 140 lbs. (63.5 kgs.)

Shipping Dimensions: 28"W x 25"D x 28"H

(71.1cm x 63.5cm x 71.1cm)

### **Factory Installed Options:**

Front mounted end **FMEW** 

weiaht


Dual wheel lift lever **LEVER** 

#### Accessories:

1326 High fence (12" x 3") Low fence (12" x 1 3/8") 1047 3" extension legs 873-SET 10 lb. attachable portion PS13

control scale

Clear plastic slicer cover SC-GLOBE

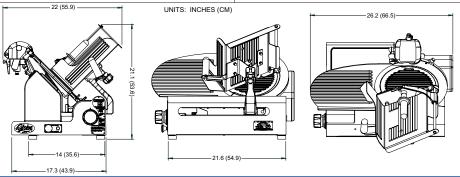

# **GLOBE FOOD EQUIPMENT COMPANY**

www.globeslicers.com

2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423

Fax: 937-299-4147